




Noise-Cancelling
Headphones

USER'S MANUAL

Product Overview

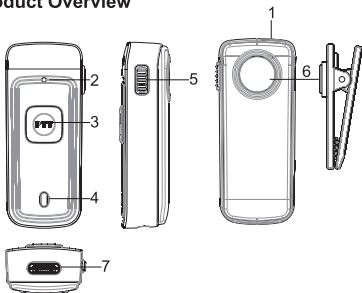

1. ϕ 2.5mm Interface for G-shape earphone cable
2. Microphone
3. Large PTT button on the front
4. LED indicator
5. Small PTT button on the side
6. Magnetic Belt clip
7. Type-C interface for charging cable or two-way radio connector cable

Assembly instructions:

1. Insert the single pin connector of the G-shape earphone cable into the 2.5mm jack on the top of the microphone shell.
2. Insert the other end of the cable with K1 two-way radio connector into the Type-C interface on the bottom of the microphone shell.
3. Clip the magnetic collar clip on the shirt collar or lapel.
4. Move the back of the microphone shell to the collar clip, and they will automatically suck together.

5. Insert the K1 connector of the earpiece into the audio jack of the two-way radio, and turn on the radio.
6. Press the large PTT button on the front of the earpiece or the small PTT button on the side to communicate with the noise-canceling function normally.

Basic operation and function of the PTT button:

When the noise-canceling earpiece is fully charged, press the PTT button to transmit voice, the red indicator light on the earpiece will light up, and the noise-canceling function will be turned on. When using the noise-canceling earpiece to communicate through a two-way radio for applications with high background noise, the ambient noise will be filtered by the device, and the emitting sound from the earpiece will only retain the human voice; in consequence, the other end of the two-way radio will receive clear speaking voice without the ambient noise.

When the noise-canceling earpiece is without power, press the PTT button, the red indicator light is off, and the noise-canceling function cannot be turned on. When using the noise-canceling earpiece to communicate through a two-way radio in environments with high background noise, the ambient noise will not be filtered by the device, and it will work as a common earpiece.

Statuses of the indicator light during operations:

Red indicator light:

Press the PTT button, and the red indicator light is on, indicating that the noise-canceling function is turned on; press the PTT button, the red indicator light is off, the battery power is insufficient, and the noise-canceling function cannot be turned on.

Orange indicator light:

When the orange indicator is on, it means that the battery is low power, and needs to be charged.

Blue indicator light:

When charging, the blue indicator light is on.

Green indicator light:

When fully charged, the blue indicator is off and the green indicator is on.

Technical specifications:

1. Battery type: built-in rechargeable Li-ion battery
2. Battery capacity: 180mah
3. Full power working time: about 60 hours
4. Charging time : about 2 hours
5. Charging voltage/current: 5.0V/500mAh
6. Type of charging interface: Type-C
7. Two-way radio connector type: Kenwood 2 pin
8. Working environment: $-20\pm 60^{\circ}\text{C}$
9. Size: 52*21.4*12.9mm
10. Weight: 23g

Charging instructions:

The output voltage and current of the charging adapter connected to the USB port of the earpiece charging cable must be within 5V/500mA.

After the charger is connected correctly, the indicator light on the earpiece will light up blue, and the indicator light will light up green when it is fully charged.

PRODUCT user GUIDE



ATTENTION!

Before using this device, read this guide which contains important operating instructions for safe usage

- **User instructions should accompany the device when transferred to other users.**
- **Do not use this device if the operational requirements described herein are not met.**

FCC Requirements:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE Requirements:

•(Simple EU declaration of conformity) Shenzhen Retevis Technology Co., Ltd. declares that the radio equipment type is in compliance with the essential requirements and other relevant provisions of EMC Directive 2014/30/EU and the ROHS Directive 2011/65/EU and the WEEE Directive 2012/19/EU; the full text of the EU declaration of conformity is available at the following internet address:
www.retevis.com.

•Restriction Information

This product can be used in EU countries and regions, including: Belgium (BE), Bulgaria (BG), Czech Republic (CZ), Denmark (DK), Germany (DE), Estonia (EE), Ireland (IE), Greece (EL), Spain (ES), France (FR), Croatia (HR), Italy (IT), Cyprus (CY), Latvia (LV), Lithuania (LT), Luxembourg (LU), Hungary (HU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Slovenia (SI), Slovakia (SK), Finland (FI), Sweden (SE) and United Kingdom (UK). For the warning information of the frequency restriction, please refer to the package.

•Disposal

The crossed-out wheeled-bin symbol on your product, literature, or packaging reminds you that in the European Union, all electrical and electronic products, batteries, and accumulators (rechargeable batteries) must be taken to designated collection locations at the end of their working life. Do not dispose of these products as unsorted municipal waste. Dispose of them according to the laws in your area.



IC Requirements:

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Le présent produit est conforme aux spécifications techniques applicables d'Innovation, Sciences et Développement économique Canada.

This apparatus is subject to Canada ICES-003 (B) / NMB-003 (B)

Electromagnetic Interference/Compatibility

NOTE: Nearly every electronic device is susceptible to electromagnetic interference (EMI) if inadequately shielded, designed, or otherwise configured for electromagnetic compatibility.

Avoid Choking Hazard



Small Parts. Not for children under 3 years.

Protect your hearing:



- Use the lowest volume necessary to do your job.
- Turn up the volume only if you are in noisy surroundings.
- Turn down the volume before adding headset or earpiece.
- Limit the amount of time you use headsets or earpieces at high volume.

- When using the radio without a headset or earpiece, do not place the radio's speaker directly against your ear
- Use careful with the earphone maybe possible excessive sound pressure from earphones and headphones can cause hearing loss

Note: Exposure to loud noises from any source for extended periods of time may temporarily or permanently affect your hearing. The louder the radio's volume, the less time is required before your hearing could be affected. Hearing damage from loud noise is sometimes undetectable at first and can have a cumulative effect.



Avoid Burns



Antennas

•Do not use any portable radio that has a damaged antenna. If a damaged antenna comes into contact with the skin when the radio is in use, a minor burn can result.

Batteries (If appropriate)

•When the conductive material such as jewelry, keys or chains touch exposed terminals of the batteries, may complete an electrical circuit (short circuit the battery) and become hot to cause bodily injury such as burns. Exercise care in handling any battery, particularly when placing it inside a pocket, purse or other container with metal objects

••BATTERY WARNING: KEEP OUT OF REACH OF CHILDREN

•Store spare batteries securely

•If the battery compartment (if applicable) does not close securely, stop using the product and keep it away from children

•If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention

•Dispose of used batteries immediately and safely

Long transmission
•When the transceiver is used for long transmissions, the radiator and chassis will become hot.

Safety Operation

Forbid

•Do not use charger outdoors or in moist environments,



use only in dry locations/conditions.

- Do not disassemble the charger, that may result in risk of electrical shock or fire.
 - Do not operate the charger if it has been broken or damaged in any way.
 - Do not place a portable radio in the area over an air bag or in the air bag deployment area. The radio may be propelled with great force and cause serious injury to occupants of the vehicle when the air bag inflates.
- To reduce risk
- Pull by the plug rather than the cord when disconnecting the charger.
 - Unplug the charger from the AC outlet before attempting any maintenance or cleaning.
 - Contact Retevis for assistance regarding repairs and service.
 - The adapter shall be installed near the equipment and shall be easily accessible

Approved Accessories



- This radio meets the RF exposure guidelines when used with the Retevis accessories supplied or designated for the product. Use of other accessories may not ensure compliance with the RF exposure guidelines and may violate regulations.
- For a list of Retevis-approved accessories for your radio model, visit the following website: <http://www.Retevis.com>

Please cut along with this line

Warranty Card

Model Number: _____

Serial Number: _____

Purchasing Date: _____

Dealer: _____ Telephone: _____

User's Name: _____ Telephone: _____

Address: _____ ZIP Code: _____

Warranty instructions:

1. This warranty card shall be kept by the customer as a warranty certificate and will not be made up for loss.
2. This card must be covered by the point of sale and the date of completion before it can take effect.
3. This card may not be modified, please confirm that the warranty card series number is consistent with the purchase radio number, otherwise it is invalid.
4. The warranty period is half a year.
5. Users can choose the following channels to obtain maintenance services:
 - a. Handle it at the original purchase office.
 - b. Our company is at the local special maintenance point.



CE FCC RoHS 

说明书要求

尺寸：70*100mm

印刷：1、黑白印刷

装订：1、骑马钉

本页无需印刷